


AL-KO Premium Marine Winches come in 5 capacities – 250kg, 500kg, 700kg, 1000kg and 1200kg, and are available with cable or webbing. Perfectly suited for quick boat retrieval onto a multi-roller trailer all 500 kg and above AL-KO Premium Marine Winches are multi speed with 2 or 3 speeds. The 1:1 ratio enables the initial retrieval of the boat onto the rollers and the second (or third) ratios allow for the full weight of your boat to be pulled onto the trailer, with ease. These winches are of the highest quality to ensure long trouble free operation. They feature ultra high strength shaft bushes, a stainless steel drive shaft, drive pawl and spring system for maximum corrosion resistance. A unique feature of the Premium range is the galvanised rectangular frame that provides the high resistance to torsional distortion. The clever handle design allows quick release and re-attachment to the desired gear shaft without the operator having to jump from one side of the trailer to the other. The bolt hole patterns suit most existing boat trailers.



AK WINCH c/w WEBBING




AK WINCH c/w CABLE

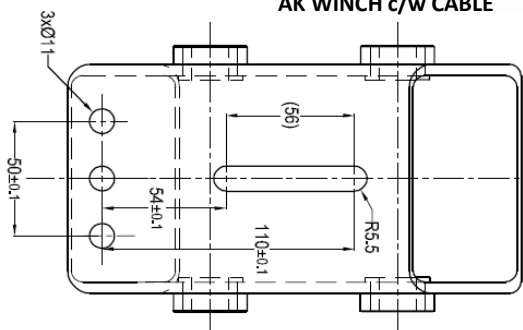


Base/ Mounting Details

PART NO.	CABLE / WEBBING	RATED LINE FULL CAPACITY	GEAR RATIO	HOOK	CABLE LENGTH	WEBBING LENGTH	HANDLE LENGTH	WEIGHT
635001W	WEBBING	250KG	1:1	"S"	--	50MM X 4M	190MM	3.4KG
635003	CABLE	500KG	3:1 1:1	"S"	4MM X 6M	--	190MM	4.1KG
635003W	WEBBING	500KG	3:1 1:1	"S"	--	50MM X 4M	190MM	3.9KG
635005	CABLE	700KG	5:1 1:1	SNAP	5MM X 6M	--	190MM	6.9KG
635005W	WEBBING	700KG	5:1 1:1	SNAP	--	50MM X 6M	190MM	6.8KG
635010	CABLE	1000KG	10:1 5:1 1:1	SNAP	6MM X 7.5M	--	190MM	8.6KG
635010W	WEBBING	1000KG	10:1 5:1 1:1	SNAP	--	50MM X 7.5M	190MM	8.1KG
635015	CABLE	1200KG	15:1 5:1 1:1	SNAP	6MM X 7.5M	--	190MM	8.7KG
635015W	WEBBING	1200KG	15:1 5:1 1:1	SNAP	--	50MM X 7.5M	190MM	8.2KG


	PART NO.	DESCRIPTION
	635905	WINCH HANDLE (STD.) 190mm
	632541	AK 11 TOOTH WINCH COG
	632542	AK 22 TOOTH WINCH COG
	632543	AK 33 TOOTH WINCH COG
	632531	AK 16mm WINCH BUSH
	632532	AK 20mm WINCH BUSH



Side Elevation



Front Elevation



Boltdown Specs.

F10212 3:1 L/DUTY WINCH (SMALL) c/w CABLE




TYPE OF RATCHET	APPLICATION	RATED CAPACITY	CABLE BREAKING STRAIN	CABLE (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
LEVER ACTION	PULLING	500KG (4900N)	865KG	6m X 4mm	20KG


F10202 3:1 L/DUTY WINCH (SMALL) c/w WEBBING




TYPE OF RATCHET	APPLICATION	RATED CAPACITY	MASS (NO WEBBING)	WEBBING (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
LEVER ACTION	PULLING	500KG (4900N)	3.81KG	6m	20KG



Side Elevation



Front Elevation



Boltdown Specs.

F10214

5:1 MED/DUTY WINCH

c/w CABLE



TYPE OF RATCHET	APPLICATION	RATED CAPACITY	CABLE BREAKING STRAIN	CABLE (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
LEVER ACTION	PULLING	700KG (6860N)	865KG	6m X 4mm	25KG


F10204

5:1 MED/DUTY WINCH


c/w WEBBING




TYPE OF RATCHET	APPLICATION	RATED CAPACITY	MASS (NO WEBBING)	WEBBING (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
LEVER ACTION	PULLING	700KG (6860N)	4.07KG	6m	25KG



Side Elevation



Front Elevation



Boltdown Specs.

F10217

5:1 1:1 H/DUTY WINCH

c/w CABLE



TYPE OF RATCHET	APPLICATION	RATED CAPACITY	CABLE BREAKING STRAIN	CABLE (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
LEVER ACTION	PULLING	700KG (6860N)	1855KG	6m X 5mm	25KG


F10206

5:1 1:1 H/DUTY WINCH


c/w WEBBING




TYPE OF RATCHET	APPLICATION	RATED CAPACITY	MASS (NO WEBBING)	WEBBING (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
LEVER ACTION	PULLING	700KG (6860N)	4.07KG	6m	25KG



Side Elevation




Front Elevation



Boltdown Specs.

F10950


10:1 5:1 1:1 EX. H/DUTY WINCH c/w CABLE

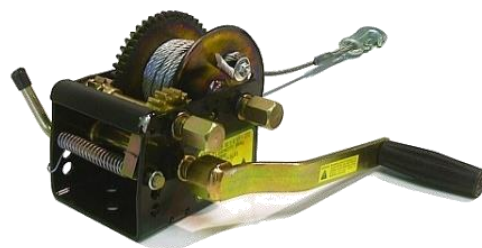


TYPE OF RATCHET	APPLICATION	RATED CAPACITY	CABLE BREAKING STRAIN	CABLE (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
LEVER ACTION	PULLING	800KG – 1000KG	1855KG	7.5m X 5mm	18KG

F10952


10:1 5:1 1:1 EX. H/DUTY WINCH c/w WEBBING

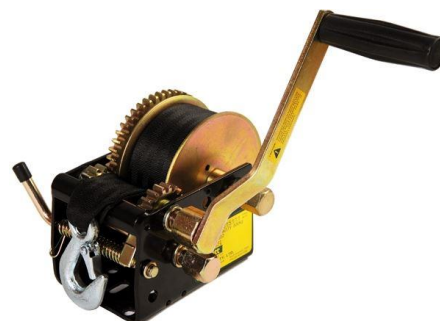


TYPE OF RATCHET	APPLICATION	RATED CAPACITY	MASS (NO WEBBING)	WEBBING (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
LEVER ACTION	PULLING	800KG – 1000KG	4.99KG	7.5m	18KG



Side Elevation



Front Elevation

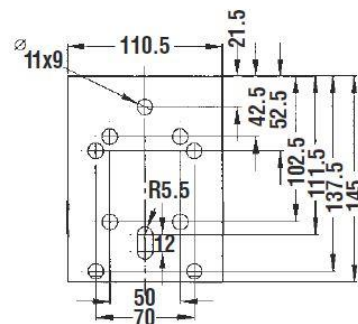

Boltdown Specs.

F18230

5:1 (300KG) BRAKE WINCH c/w CABLE



TYPE OF BRAKE	APPLICATION	RATED CAPACITY	CABLE BREAKING STRAIN	CABLE (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
SELF ACTUATING	LIFTING	300KG (2940N)	1905KG	7.5m X 5mm	26KG

F18260

10:1 (500KG) BRAKE WINCH c/w CABLE



TYPE OF BRAKE	APPLICATION	RATED CAPACITY	CABLE BREAKING STRAIN	CABLE (AS SUPPLIED)	MAX. EFFORT ON HANDLE @ RATED LOAD
SELF ACTUATING	LIFTING	500KG (4900N)	2800KG	7.5m X 6mm	18KG

SA**TRAILER****& CHASSIS EQUIPMENT****WINCHE PARTS****SPARE CABLES****Part No.****Description**

51D

4mm x 6mtr. Cable c/w Snap Hook

51E

5mm x 6mtr. Cable c/w Snap Hook

10111G

6mm x 5.5mtr. Cable c/w Snap Hook


**Part No.****Description**

51F

6mtr. Webbing c/w Snap Hook

10111H

7.5mtr. Webbing c/w Snap Hook

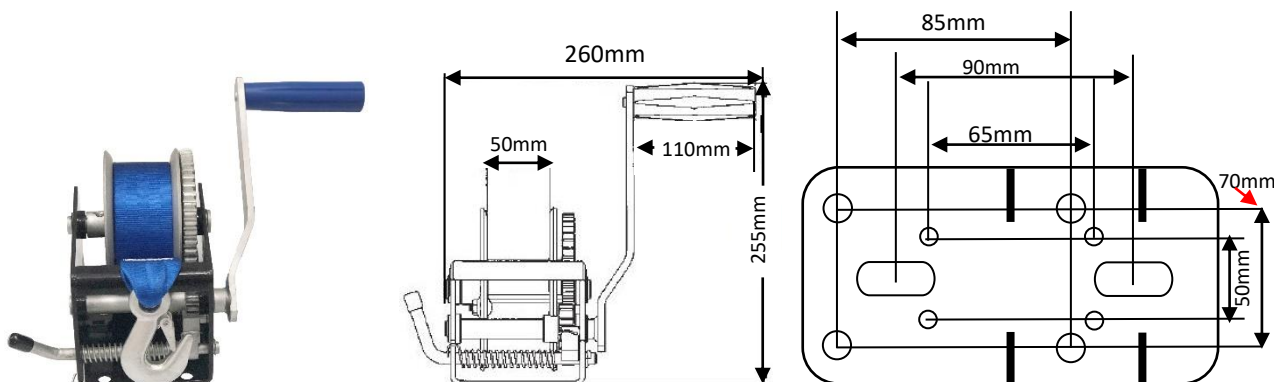


3:1 BLACK POWDER COATED WINCH c/w 7mtr BLUE WEBBING

PART NO.	RATED CAPACITY	WEBBING SIZE	WEIGHT
SAHW31W	500KG	50mm x 7mtr	5.1KG





3:1 BLACK POWDER COATED WINCH c/w 6mtr BLUE ROPE

PART NO.	RATED CAPACITY	WEBBING SIZE	WEIGHT
SAHW31R	500KG	4mm x 6mtr	5.1KG




3:1 BLACK POWDER COATED WINCH c/w 6mtr CABLE

PART NO.	RATED CAPACITY	WEBBING SIZE	WEIGHT
SAHW31C	500KG	4mm x 6mtr	5.1KG

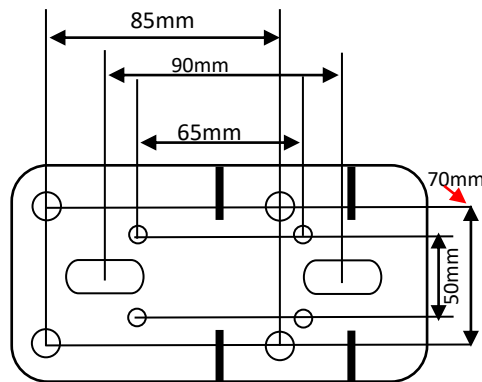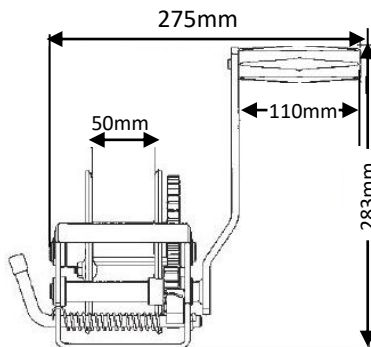


5:1 1:1 BLACK POWDER COATED WINCH c/w 7mtr BLUE WEBBING

PART NO.	RATED CAPACITY	WEBBING SIZE	WEIGHT
SAHW51W	700KG	50mm x 7mtr	5.2KG

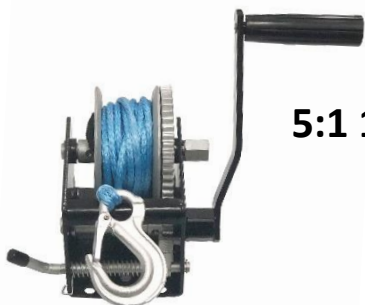


5:1 1:1 BLACK POWDER COATED WINCH c/w 7.5mtr BLUE ROPE

PART NO.	RATED CAPACITY	WEBBING SIZE	WEIGHT
SAHW51R	700KG	5mm x 7.5mtr	5.2KG

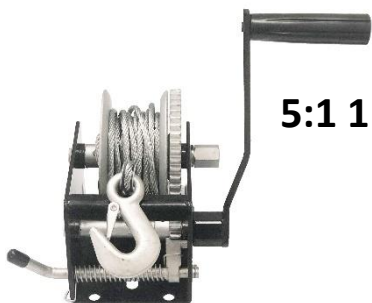


5:1 1:1 BLACK POWDER COATED WINCH c/w 7.5mtr CABLE

PART NO.	RATED CAPACITY	WEBBING SIZE	WEIGHT
SAHW51C	700KG	5mm x 7.5mtr	5.2KG

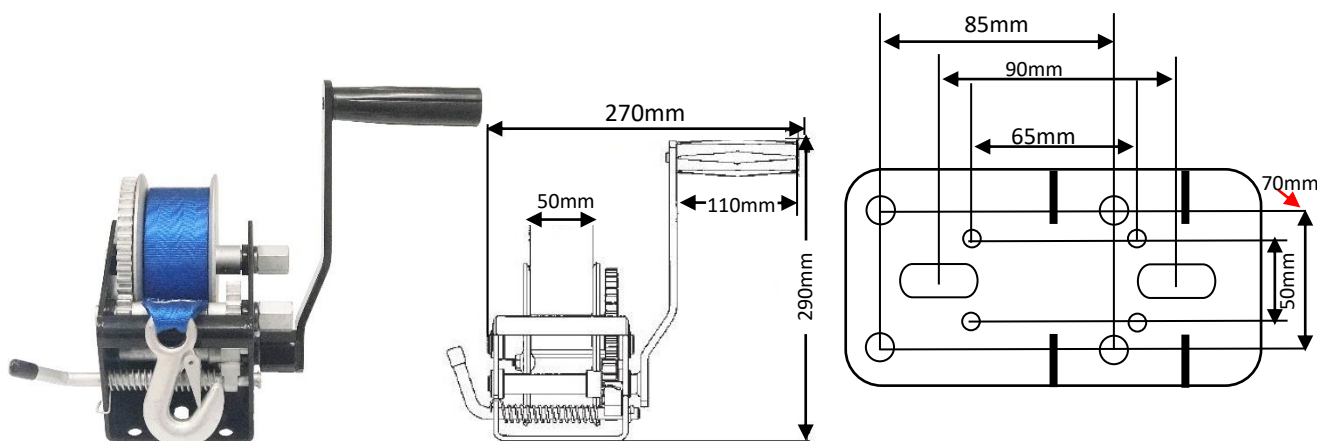




**10:1 5:1 1:1 BLACK POWDER COATED
WINCH c/w 8mtr BLUE WEBBING**

PART NO.	RATED CAPACITY	WEBBING SIZE	WEIGHT
SAHW101W	1000KG	50mm x 8mtr	5.7KG

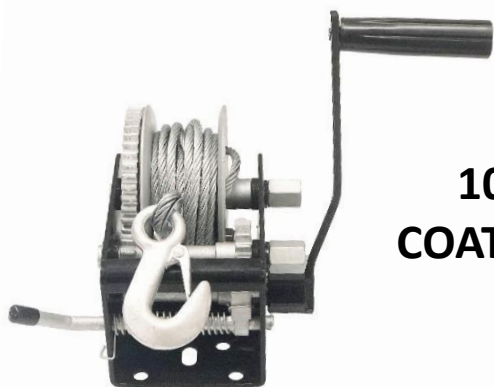


**10:1 5:1 1:1 BLACK POWDER
COATED WINCH c/w 7.5mtr CABLE**

PART NO.	RATED CAPACITY	WEBBING SIZE	WEIGHT
SAHW101C	1000KG	5mm x 7.5mtr	5.7KG

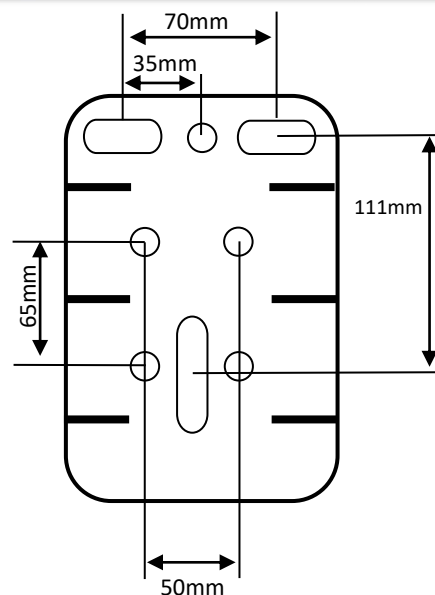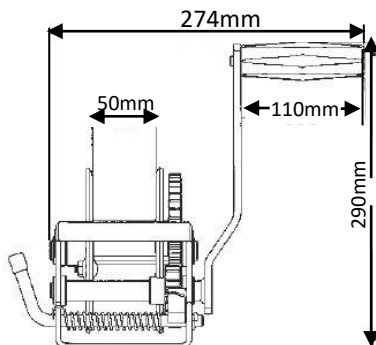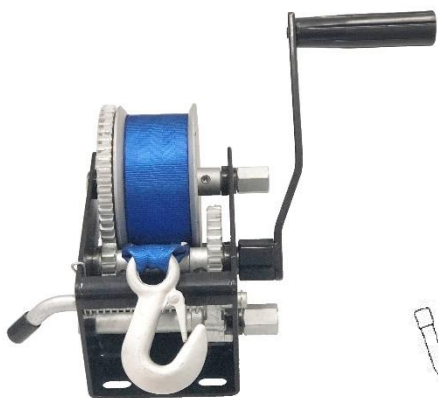




**15:1 4.5:1 1:1 BLACK POWDER COATED
WINCH c/w 8mtr BLUE WEBBING**

PART NO.	RATED CAPACITY	WEBBING LENGHT	WEIGHT
SAHW151W	1500KG	50mm x 8mtr	6.7KG

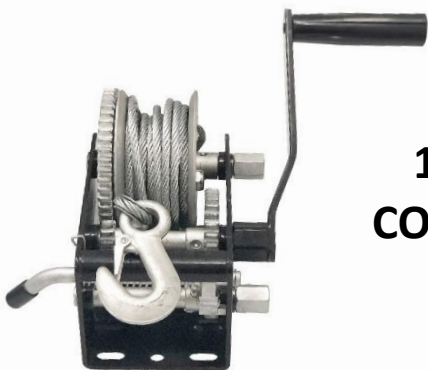

**15:1 4.5:1 1:1 BLACK POWDER
COATED WINCH c/w 7.5mtr CABLE**

PART NO.	RATED CAPACITY	WEBBING LENGHT	WEIGHT
SAHW151C	1500KG	5mm x 7.5mtr	6.7KG

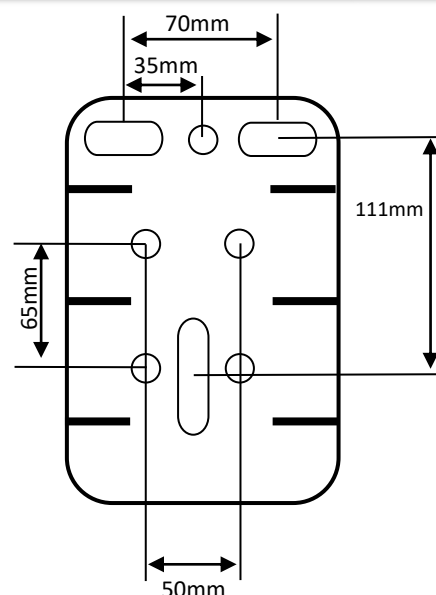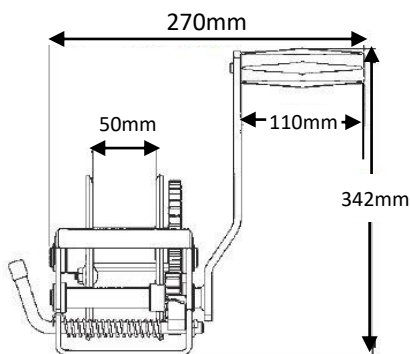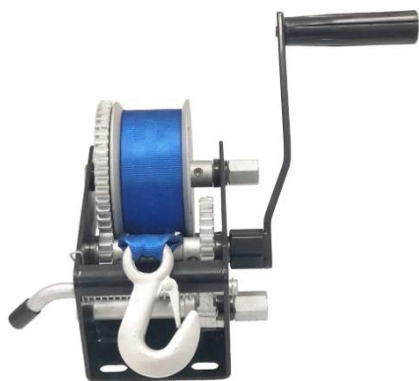

**17:1 5:1 1:1 BLACK POWDER COATED
WINCH c/w 10mtr BLUE WEBBING**

PART NO.	RATED CAPACITY	WEBBING LENGHT	WEIGHT
SAHW171W	2000KG	50mm x 10mtr	6.7KG



**17:1 5:1 1:1 BLACK POWDER
COATED WINCH c/w 10mtr CABLE**

PART NO.	RATED CAPACITY	WEBBING LENGHT	WEIGHT
SAHW171C	2000KG	5mm x 10mtr	6.7KG

	PART NO.	DESCRIPTION
	SA507W	SPARE BLUE WEBBING (50mm x 7mtr)
	SA508W	SPARE BLUE WEBBING (50mm x 8mtr)
	SA46C	SPARE CABLE (4mm x 6mtr)
	SA57C	SPARE CABLE (5mm x 7.5mtr)
	SA67C	SPARE CABLE (6mm x 7.5mtr)
	SA46R	SPARE BLUE ROPE (4mm x 6mtr)
	SA57R	SPARE BLUE ROPE (5mm x 7.5mtr)
	SAWHB	SPARE POWDER COATED HANDLE (230mm) (BL PACK)
	SAWHD	SPARE POWDER COATED HANDLE (230mm) (BL PACK)